


DAKTRONICS FB-2022 PRODUCT SPECIFICATIONS

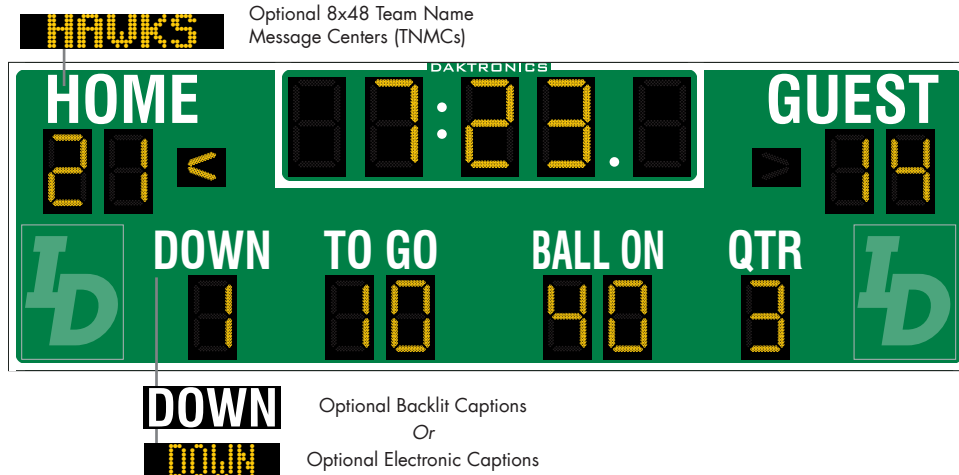

This outdoor LED football/track scoreboard displays period time or race time to 99:59.9, HOME and GUEST scores to 99 and DOWN/TO GO/BALL ON/QTR (quarter) information. T.O.L. (time outs left) to nine are optional. Arrows indicate possession. Scoreboard comes standard with track captions on changeable panels. When period time is less than one minute, the scoreboard displays time to 1/10 of a second. Scoreboard shown with optional striping and amber PanaView® digits.

DIMENSIONS	# OF SECTIONS
8'-0" H x 25'-0" W x 8" D (2.44 m, 7.62 m, 203 mm)	Two Total
4'-0" H x 25'-0" W x 8" D (1.22 m, 7.62 m, 203 mm)	One Top & One Bottom

		VINYL CAPTIONS (STANDARD)	TNMCs & VINYL CAPTIONS	TNMCs & ELECTRONIC CAPTIONS	BACKLIT CAPTIONS
POWER (120 VAC)*	Red/Amber Digits	320 Watts, 2.7 Amps	420 Watts, 3.5 Amps	600 Watts, 5.0 Amps	530 Watts, 4.5 Amps
	White Digits	670 Watts, 5.6 Amps	900 Watts, 7.5 Amps	1260 Watts, 10.5 Amps	880 Watts, 7.4 Amps
UNCRATED WEIGHT	Top Section	410 lb (186 kg)	530 lb (240 kg)	530 lb (240 kg)	474 lb (215 kg)
	Bottom Section	410 lb (186 kg)	410 lb (186 kg)	570 lb (259 kg)	490 lb (222 kg)
	Total	820 lb (372 kg)	940 lb (426 kg)	1100 lb (499 kg)	964 lb (437 kg)

*Scoreboard requires a dedicated circuit. Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).

DIGITS & INDICATORS

- Clock digits are 30" (762 mm) high. Optional T.O.L. digits are 18" (457 mm) high. All other digits are 24" (610 mm) high.
- Select red, amber, or white LED digits and indicators. Scoreboard may instead have mixed LED digit colors (see [DD1965467](#)).
- Scoreboard features robust weather-sealed digits (see [DD2495646](#)).
- Digits may be dimmed for night viewing.

DISPLAY COLOR

Choose from 150+ colors (from Martin Senour® paint book) at no additional cost.

OPERATING TEMPERATURES

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

CAPTIONS

- HOME and GUEST captions are 15" (381 mm) high. All other captions are 12" (305 mm) high.
- Standard captions are vinyl, applied to the display face. Track captions are on changeable panels.
- Optional backlit captions consist of white letters on a black background. Team names are 14" (356 mm) high. All other captions are 12" (305 mm) high.
- Optional electronic captions change according to the sport mode, eliminating the need for caption panels. Electronic captions and TNMCs are 10.6" (269 mm) high.

CONSTRUCTION

Alcoa aluminum alloy 5052 for excellent corrosion resistance

PRODUCT SAFETY APPROVAL

ETL-listed to UL 48, tested to CSA standards, and CE-labeled

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD2167302 091520 Page 1 of 10



DAKTRONICS FB-2022 PRODUCT SPECIFICATIONS

CONTROL CONSOLE	CONTROL OPTIONS
All Sport® 5000 (see SL-03991)	Wired (standard): One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console. Wireless (optional): 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370).
OmniSport® 2000 (see SL-05408)	Optional controller for semi-automatic push-button track timing only. An All Sport 5000 is still required for primary sport scoring functions.
DAK Score & MX-1 (see DD3888368)	CUSTOMER-SUPPLIED mobile device or tablet with DAK Score app installed communicates via Bluetooth® wireless technology to an MX-1 Interface Box that controls the scoreboard through 2.4 GHz radio or wired connection. Track timing not currently supported.

SEGMENT TIMER MODE

The segment timer mode is ideal for keeping practices on schedule. The horn at the end of a segment allows coaches and athletes to focus on the practice and to listen for the horn when it is time to change drills (see [SL-04004](#)).

TIME OF DAY MODE

This scoreboard features a Time of Day (TOD) mode that allows it to act as a clock when the control console is unplugged or off. Refer to the scoreboard installation manual for instructions on how to enable the Time of Day mode.

MOUNTING

Scoreboard is typically mounted on two vertical beams or poles. Hardware to mount scoreboard on two beams is included; hardware for more beams is at additional cost. Standard mounting uses I-beam clamps. Optional mounting method using angle brackets is also offered; maximum beam width is 12" (305 mm) and maximum beam depth is 22" (559 mm). Refer to attached drawings for more information on mounting methods.

SERVICE ACCESS

Digit panels and electronics are serviced from the front of the scoreboard.

GENERAL INFORMATION

Scoreboard provides scoring capabilities for two teams. 100% solid state electronics are housed in an all aluminum cabinet. Scoreboard is shipped in two sections. Scoreboard power is to be provided on a dedicated circuit to prevent loss of game information due to failure of another component on the circuit. Specifications and pricing are subject to change without notice.

ADVERTISING/IDENTIFICATION PANELS

Backlit & Non-Backlit:

1'-6" H x 25'-0" W (457 mm, 7.62 m)
 2'-0" H x 25'-0" W (610 mm, 7.62 m)
 2'-6" H x 25'-0" W (762 mm, 7.62 m)
 3'-0" H x 25'-0" W (914 mm, 7.62 m)
 4'-0" H x 25'-0" W (1.22 m, 7.62 m)

For additional non-backlit panel sizes, see [SL-03761](#).

OPTIONS & ACCESSORIES

- Scoreboard border striping
- Multiple caption and striping colors (see [DD2101644](#))
- Team name caption in place of HOME *
- Team names on changeable panels **
- Programmable Team Name Message Centers (see [DD1696958](#))
- Backlit team name captions
- Backlit or electronic captions
- T.O.L. digits with captions
- Two 3'-6" (1.07 m) tall x 2'-7.75" (806 mm) wide logo/sponsor panels (not available with T.O.L. digits). Copy is applied to removable panels.
- Baseball, lacrosse/field hockey and soccer captions on changeable panels
- LED colon & decimal
- Horn
- Individual digit protective screens (see [SL-04939](#))
- Protective netting (see [DD2690927](#))
- Optional angle bracket mounting method
- Advertising/identification panels
- Decorative accents
- Electronic message centers and video displays in multiple sizes

* Not available with TNMCs

** Not available with TNMCs or Backlit Team Names

FOR ADDITIONAL INFORMATION

- Installation Specifications: DWG-1183308 (attached)
- Standard I-beam Mounting: DWG-1052565 (attached)
- LVX I-Beam Mounting: DWG-3918361 (attached)
- Optional Pole Mounting: DWG-1048184 (attached)
- Component Locations (Red/Amber Digits): DWG-1072177 (attached)
- Component Locations (White Digits): DWG-3025574 (attached)
- Architectural Specifications: See [SL-10087](#)

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Daktronics, Inc. is under license.


WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
 Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
 DD2167302 091520 Page 2 of 10



DAKTRONICS FB-2022 PRODUCT SPECIFICATIONS

ALTERNATE CAPTIONS & SCORING MODES

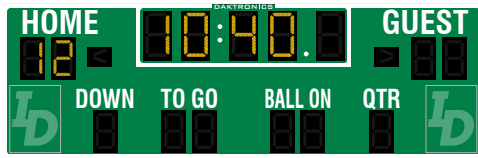

Segment Timer Mode



Standalone Time of Day Mode



Football Mode –
Optional TNMCs shown



Football Mode with T.O.L. Option –
vinyl, backlit & electronic captions shown
(vinyl or backlit T.O.L. captions only;
with electronic captions, T.O.L. is always backlit)



Vinyl Track Captions
Included on
Changeable Panels




TNMCs always display
HOME & GUEST when
in manual push-button
timing mode.



Track Mode, EVENT/HEAT –
vinyl, backlit & electronic captions shown

Track Mode, GUEST 2/GUEST 3 –
vinyl, backlit & electronic captions shown




DAKTRONICS FB-2022 PRODUCT SPECIFICATIONS

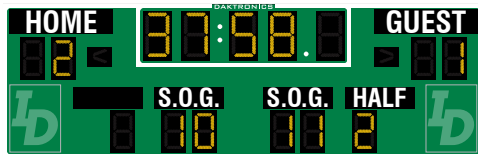

Soccer Mode –
vinyl, backlit & electronic captions shown
(SHOTS displayed with electronic captions)



Lacrosse/Field Hockey Mode –
vinyl, backlit & electronic captions shown
(SHOTS & PER displayed with electronic captions)

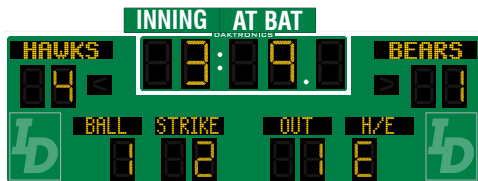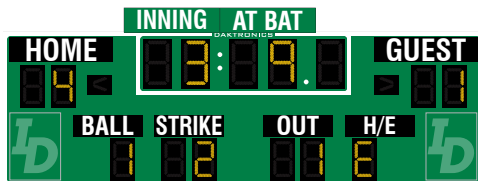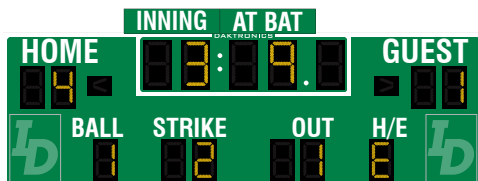

Baseball Mode, without Clock –
vinyl, backlit & electronic captions shown
(12" vinyl INNING/AT BAT captions only)



Baseball Mode, with Clock –
vinyl, backlit & electronic captions shown
(6" vinyl H/E captions only)

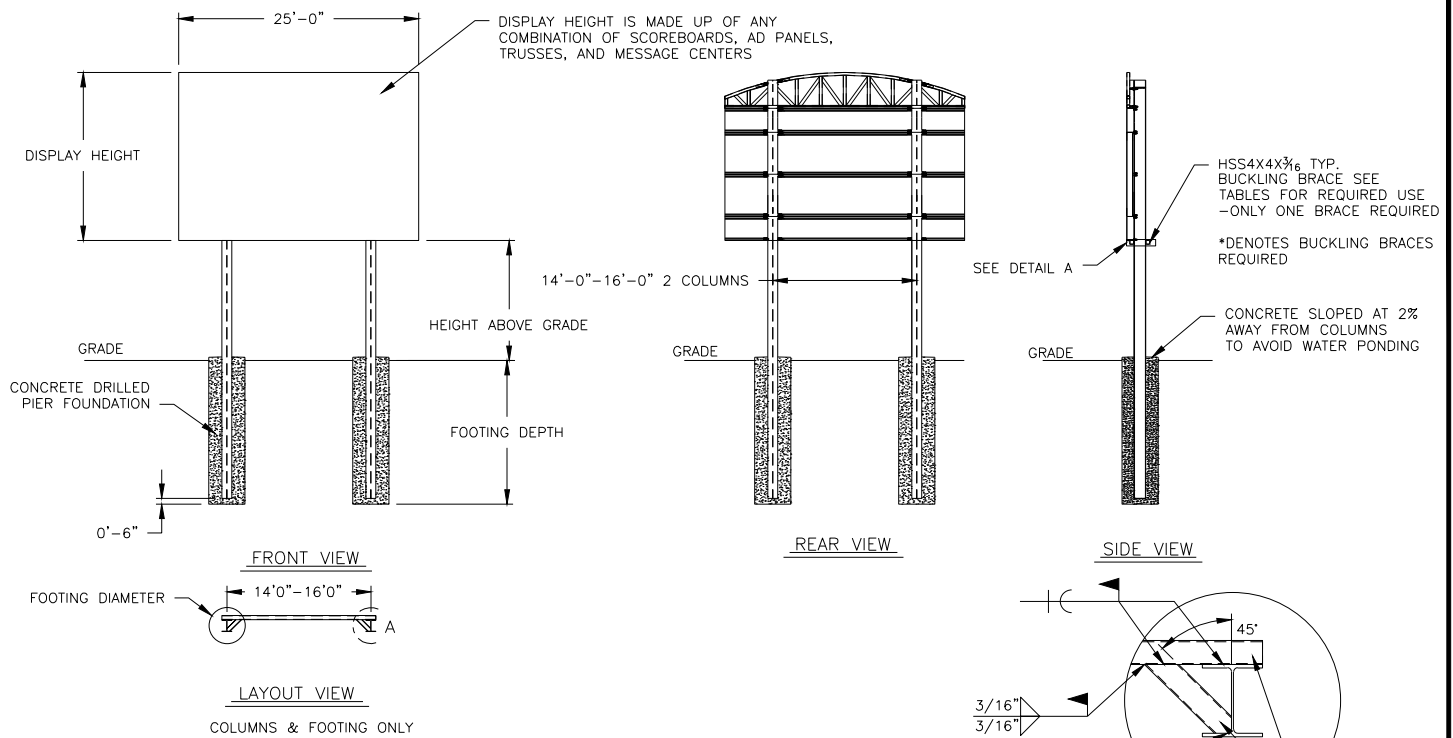


TABLE A - MOUNTING

EXPOSURE B

HEIGHT ABOVE GRADE = 10'						HEIGHT ABOVE GRADE = 15'					
DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY				DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY			
		115 MPH	130 MPH	150 MPH	170 MPH			115 MPH	130 MPH	150 MPH	170 MPH
8	COLUMN FOOTING	W8X28 3.0'X8.0'	W8X31 3.0'X9.0'	W14X38 3.0'X10.0'	W12X40 3.0'X11.0'	8	COLUMN FOOTING	W10X39 3.0'X9.0'	W14X43 3.0'X10.0'	W10X49 3.0'X11.0'	W12X58 3.0'X12.0'
10	COLUMN FOOTING	W10X33 3.0'X9.0'	W10X39 3.0'X10.0'	W14X43 3.0'X11.0'	W12X53 3.0'X12.0'	10	COLUMN FOOTING	W10X45 3.0'X10.0'	W12X53 3.0'X11.0'	W12X58 4.0'X11.0'	W16X67 4.0'X13.5'
12	COLUMN FOOTING	W10X39 3.0'X10.0'	W14X43 3.0'X10.5'	W12X53 3.0'X12.0'	W14X61 4.0'X12.0'	12	COLUMN FOOTING	W12X53 3.0'X11.0'	W12X58 3.0'X12.0'	W12X72 3.0'X13.5'	W18X76 3.0'X13.5'
14	COLUMN FOOTING	W14X43 3.0'X10.5'	W12X53 3.0'X11.5'	W12X58 4.0'X11.5'	W16X67 4.0'X13.0'	14*	COLUMN FOOTING	W14X48 3.0'X11.5'	W18X55 3.0'X13.0'	W21X62 4.0'X13.0'	W24X68 4.0'X15.0'
16	COLUMN FOOTING	W12X53 3.0'X11.5'	W14X61 4.0'X11.0'	W12X72 4.0'X12.5'	W18X86 4.0'X14.5'	16*	COLUMN FOOTING	W21X48 4.0'X11.0'	W21X62 4.0'X12.0'	W21X68 4.0'X14.5'	W24X76 4.0'X17.0'
18*	COLUMN FOOTING	W16X40 3.0'X12.0'	W21X48 4.0'X12.0'	W21X55 4.0'X14.0'	W21X68 4.0'X16.0'	18*	COLUMN FOOTING	W21X55 4.0'X12.0'	W16X67 3.0'X16.0'	W18X76 4.0'X16.0'	W27X84 4.0'X18.5'
20*	COLUMN FOOTING	W14X48 3.0'X13.0'	W18X55 3.0'X15.0'	W21X62 4.0'X15.0'	W24X68 4.0'X18.0'	20*	COLUMN FOOTING	W21X62 4.0'X12.5'	W24X68 4.0'X14.5'	W24X84 4.0'X17.5'	W30X90 5.0'X17.5'

FOOTING DIMENSIONS = DIAMETER X DEPTH

* DENOTES ADDITIONAL BRACES REQUIRED AT THE MID HEIGHT OF DISPLAY

EXPOSURE C

HEIGHT ABOVE GRADE = 10'				HEIGHT ABOVE GRADE = 15'			
DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY		DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY	
		115 MPH	140 MPH			115 MPH	140 MPH
8	COLUMN FOOTING	W10X33 3.0'X9.5'	W12X40 3.0'X10.5'	8	COLUMN FOOTING	W14X43 3.0'X10.0'	W12X58 3.0'X12.0'
10	COLUMN FOOTING	W14X43 3.0'X10.5'	W12X53 3.0'X11.5'	10	COLUMN FOOTING	W12X53 3.0'X11.5'	W12X65 3.0'X13.5'
12	COLUMN FOOTING	W14X48 3.0'X11.5'	W12X58 4.0'X11.5'	12	COLUMN FOOTING	W14X61 4.0'X12.0'	W18X76 4.0'X13.0'
14	COLUMN FOOTING	W12X53 4.0'X11.0'	W16X67 4.0'X13.0'	14*	COLUMN FOOTING	W21X48 4.0'X12.0'	W21X68 4.0'X14.5'
16	COLUMN FOOTING	W12X65 4.0'X11.5'	W18X76 4.0'X14.0'	16*	COLUMN FOOTING	W21X62 4.0'X13.0'	W18X76 4.0'X16.0'
18*	COLUMN FOOTING	W21X48 4.0'X12.5'	W21X62 4.0'X15.5'	18*	COLUMN FOOTING	W21X68 4.0'X14.0'	W24X84 4.0'X18.0'
20*	COLUMN FOOTING	W21X55 4.0'X13.5'	W21X68 4.0'X17.0'	20*	COLUMN FOOTING	W18X76 4.0'X15.5'	W30X90 5.0'X17.0'


FOOTING DIMENSIONS = DIAMETER X DEPTH

* DENOTES ADDITIONAL BRACES REQUIRED AT THE MID HEIGHT OF DISPLAY

NOTES:

1. FOOTING AND COLUMN SIZES ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES. THE DESIGN MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF THE INSTALLATION BEFORE THEY CAN BE USED FOR FABRICATION OR ERECTION.
2. INTERNATIONAL BUILDING CODE 2012 USED IN DESIGN OF COLUMNS AND FOOTINGS WITH IMPORTANCE FACTOR=1, Kzt=1.0, Kd=0.85, G=0.85. SEISMIC DESIGN WAS NOT CONSIDERED.
3. FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL CLASS 4 (ALLOWABLE LATERAL BEARING PRESSURE OF 150 psf).
4. STRUCTURAL STEEL IS GRADE A992 (50 ksi) STEEL. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 2500 psi.
5. THE AVERAGE DISPLAY WEIGHT FOR A LAYOUT CAN NOT EXCEED 8 PSF.
6. DAKTRONICS INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.
7. LOCAL BUILDING OFFICIALS SHOULD BE CONTACTED TO DETERMINE THE WIND SPEED AND EXPOSURE CATEGORY FOR THE PROPOSED SIGN LOCATION. THE EXPOSURE CATEGORY C IS DEFINED AS:
EXPOSURE B - URBAN AND SUBURBAN AREAS, OR OTHER TERRAIN WITH NUMEROUS SPACED OBSTRUCTIONS HAVING THE SIZE OF SINGLE-FAMILY DWELLINGS OR LARGER. THESE CONDITIONS MUST PREVAIL FOR A DISTANCE FROM THE SIGN OF AT LEAST 2,600 FT OR 20 TIMES THE SIGN HEIGHT, WHICHEVER IS GREATER
EXPOSURE C - OPEN TERRAIN WITH SCATTERED OBSTRUCTIONS HAVING HEIGHTS GENERALLY LESS THAN 30 FT. THIS CATEGORY INCLUDES FLAT OPEN COUNTRY, GRASSLANDS, AND ALL WATER SURFACES IN HURRICANE PRONE REGIONS.
8. FOR SPECIFIC PRODUCT DETAILS ON WEIGHT, MOUNTING, ETC. REFER TO THE INDIVIDUAL PRODUCT SPECIFICATION SHEETS.

		DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2014 DAKTRONICS, INC.	
		PROJ: OUTDOOR SCOREBOARD INSTALLATION TITLE: 25' WIDTH SCOREBOARD INSTALLATION SPECS. DESIGN: TTASCHN DRAWN: TTASCHN DATE: 22JUL14 SCALE: 1/16" = 1'			
SHEET		REV		JOB NO:	
		00		P1538	
				FUNC-TYPE-SIZE	
				E-10-A	
1183308					

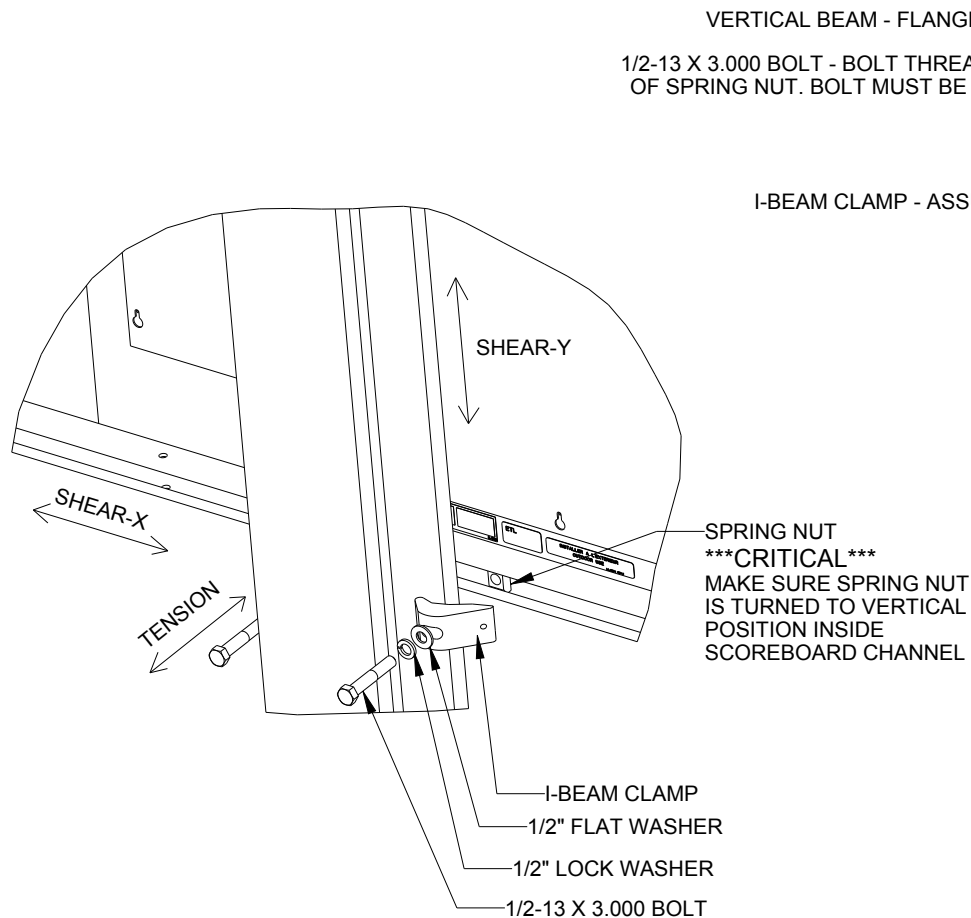

EXPLODED REAR ISOMETRIC VIEW

STANDARD MOUNTING METHOD


MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN APPROXIMATE LOCATION OF VERTICAL BEAMS
2. LIFT SCOREBOARD INTO POSITION
3. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
4. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
5. IF FLANGE THICKNESS IS MORE THAN 3/4" THICK LONGER BOLTS WILL BE REQUIRED AT THE CUSTOMER'S EXPENSE.


STRUCTURAL NOTES


ALLOWABLE CAPACITY PER EACH CLAMP:
SHEAR = 160 LBS
TENSION = 2300 LBS



SHEAR AND TENSION LOAD
DIRECTION ARE AS INDICATED ON
REAR ISOMETRIC VIEW

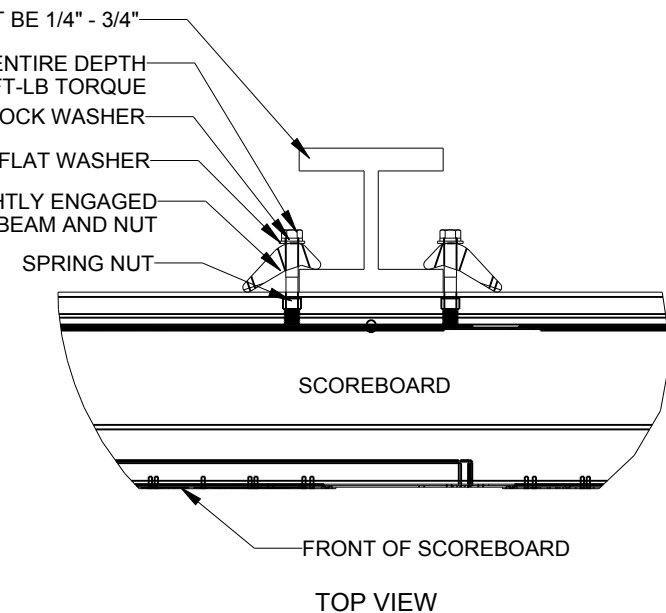

05	22 DEC 15	PER EC-22871; ADDED LUBRICANT NOTE	PJS 18704
04	06 JAN 14	ADDED ALLOWABLE TENSION AND SHEAR CAPACITY DETAILS	JAVA
03	23 OCT 13	PER EC-12382; CHANGED BOLT TORQUE FROM 30 FT-LB TO 40 FT-LB	NJM
02	07 MAR 12	ADDED STANDARD MOUNTING METHODS NOTES	KDD
01	21 FEB 12	CHANGED ROCKER TO I-BEAM	KDD
REV	DATE:		BY:

		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)			
PROJECT: OUTDOOR SCOREBOARD					
TITLE: P1647; I-BEAM CLAMP MOUNTING					
DATE: 22-DEC-15		DIM UNITS: INCHES [MILLIMETERS]		SHEET	REV
SCALE: 1/8		DO NOT SCALE DRAWING		1 OF 1	05
DESIGN: MCARSRU		JOB NO.	FUNC - TYPE - SIZE	1052565	
DRAWN: MCARSRU		P1647	E - 07 - A		

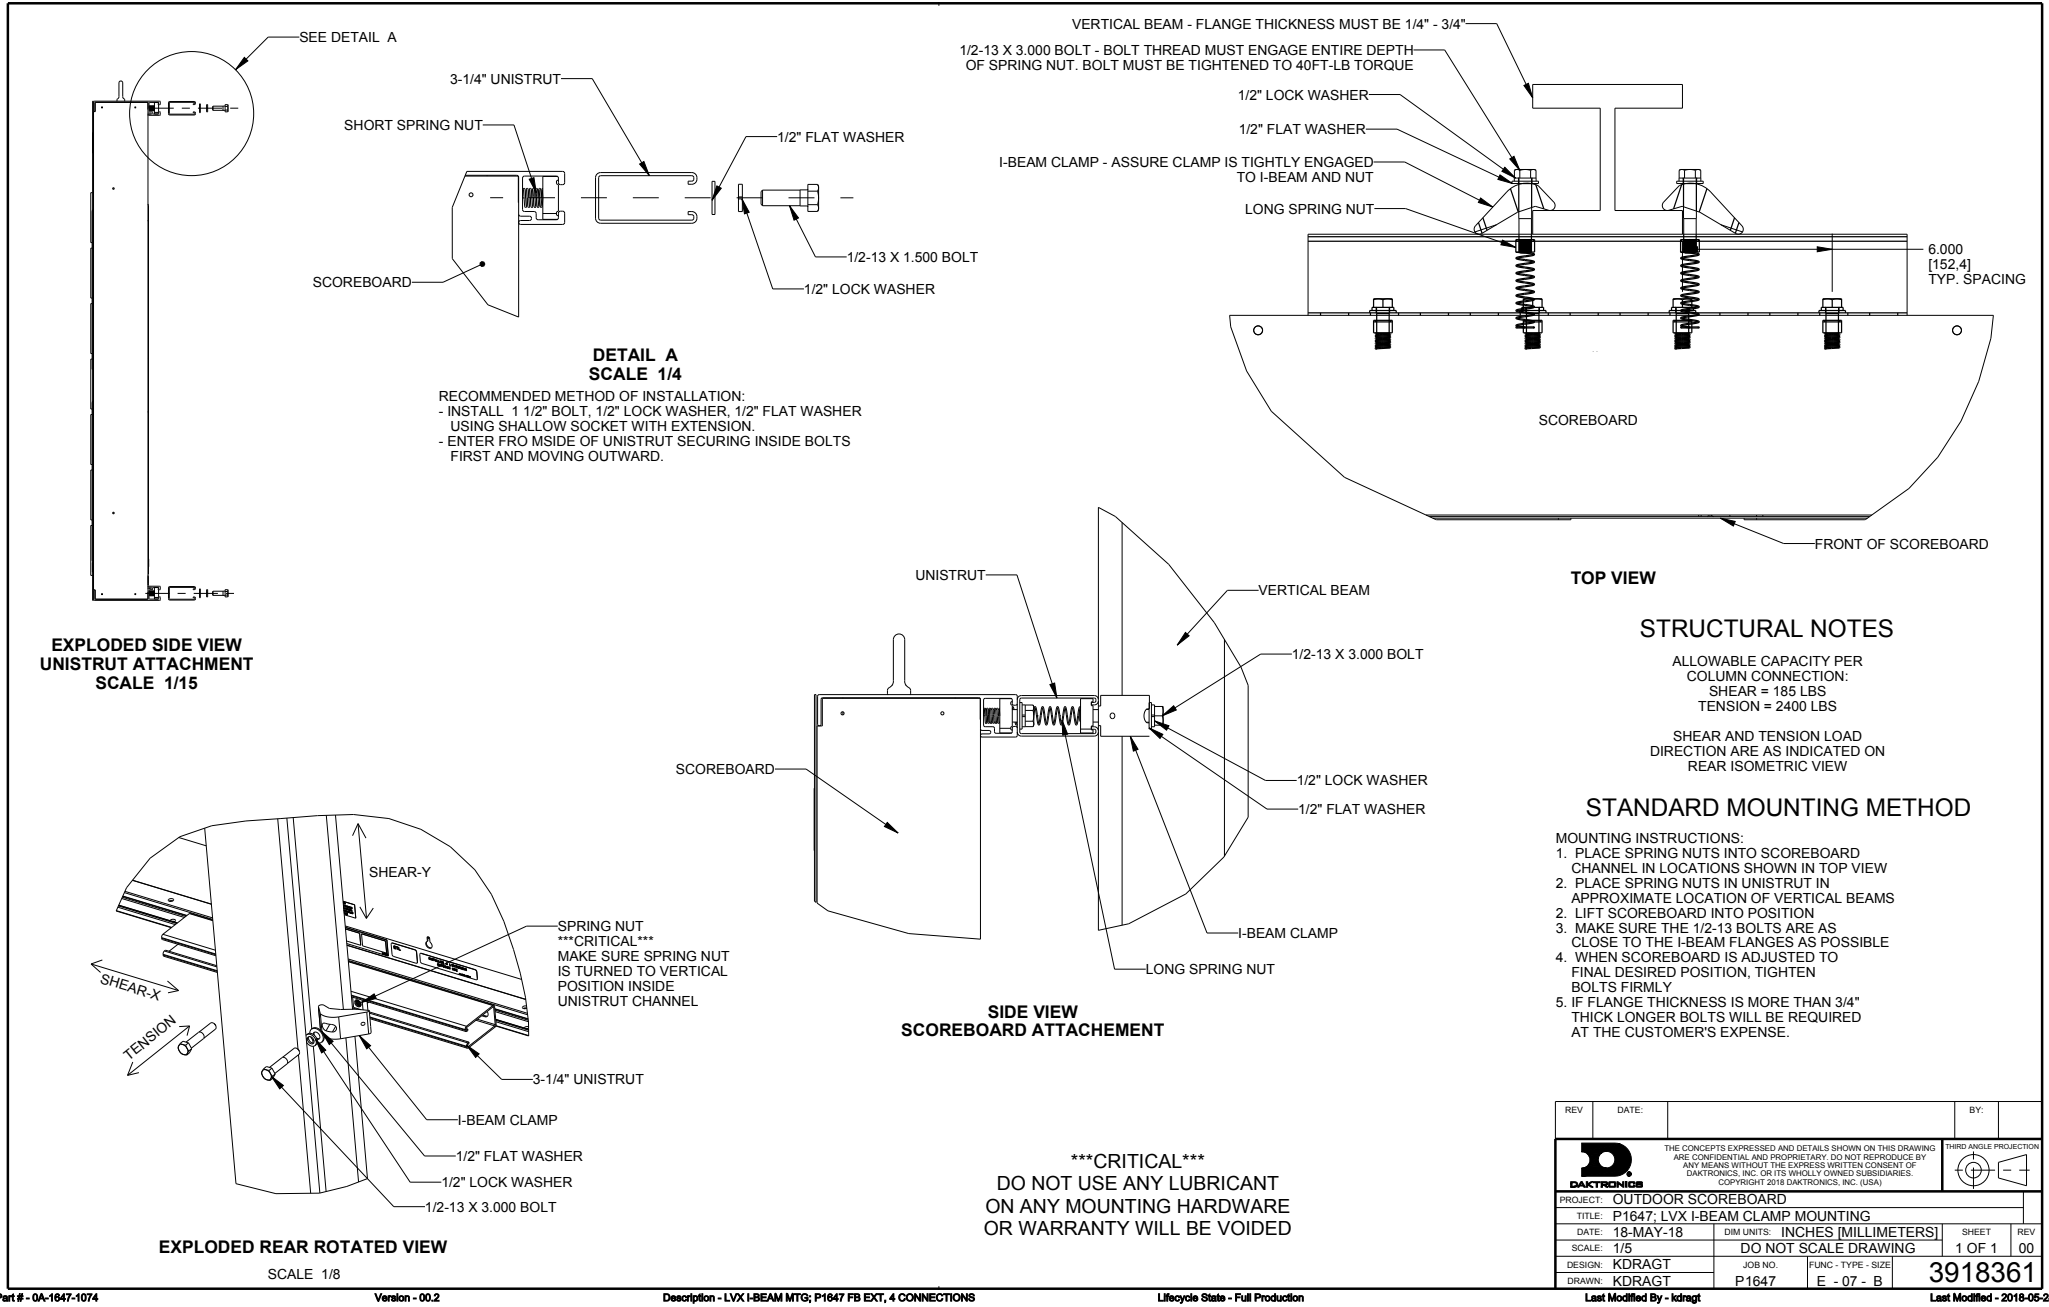


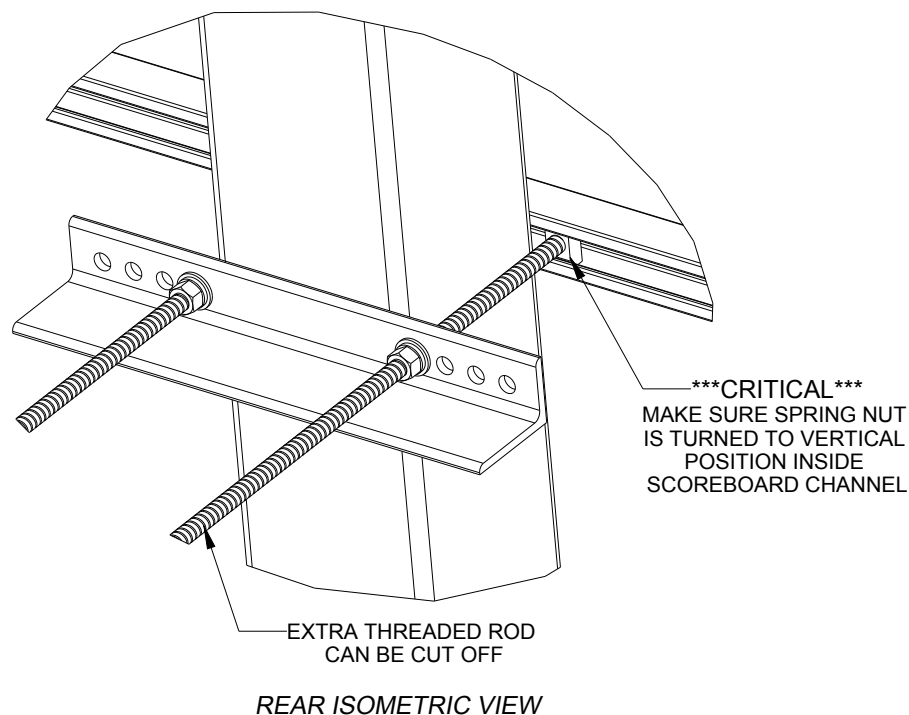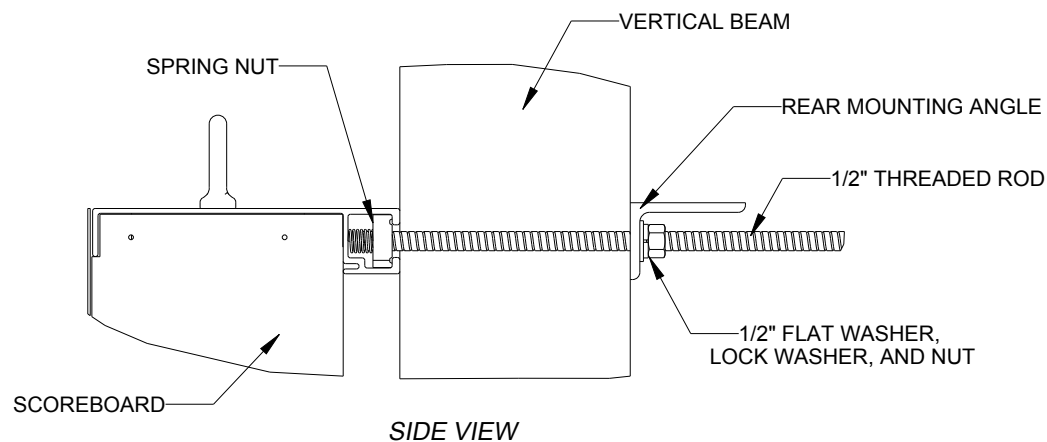

STRUCTURAL NOTES:
- BOLT TORQUE: 30 FT-LB

NOTES:

- THREADED RODS RUN ALONG BOTH SIDES OF BEAM
- RODS DO NOT PASS THROUGH THE FLANGES OF THE BEAM
- NO DRILLING NECESSARY
- MAKE SURE SPRING NUT IS PERPENDICULAR TO CHANNEL OPENING ON SCOREBOARD

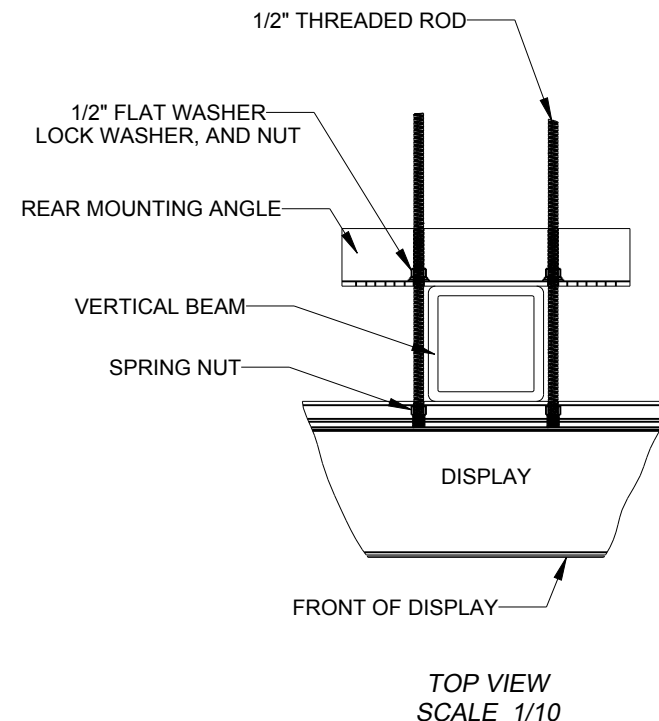


*****CRITICAL*****
DO NOT USE ANY LUBRICANT
ON ANY MOUNTING HARDWARE
OR WARRANTY WILL BE VOIDED

04	22 DEC 15	PER EC-22871; ADDED LUBRICANT WARNING	PJS 18704	
03	03 JULY 13	ADDED STRUCTURAL NOTE	TTF	
02	20 SEP 12	PER EC-7114; REMOVED CHAMFER FROM 0M-133259	LMG	
01	06 OCT 11	REPLACED VERTICAL I-BEAM WITH 6" X 6" SQUARE TUBE	JAVA	
REV	DATE:		BY:	



THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)




PROJECT: OUTDOOR SCOREBOARDS				
TITLE: P1647; POLE MOUNTING OPTIONS				
DATE: 22-DEC-15	DIM UNITS: INCHES [MILLIMETERS]		SHEET	REV
SCALE: 1/5	DO NOT SCALE DRAWING		1 OF 1	04
DESIGN: DOPPELT	JOB NO.	FUNC - TYPE - SIZE	1048184	
DRAWN: DOPPELT	P1647	E - 10 - A		

FB-2022-R/-A

SECONDARY DRIVER (A1)

OPTIONAL 2" LED COLONS

OPTIONAL TMCS
8x48-34mm

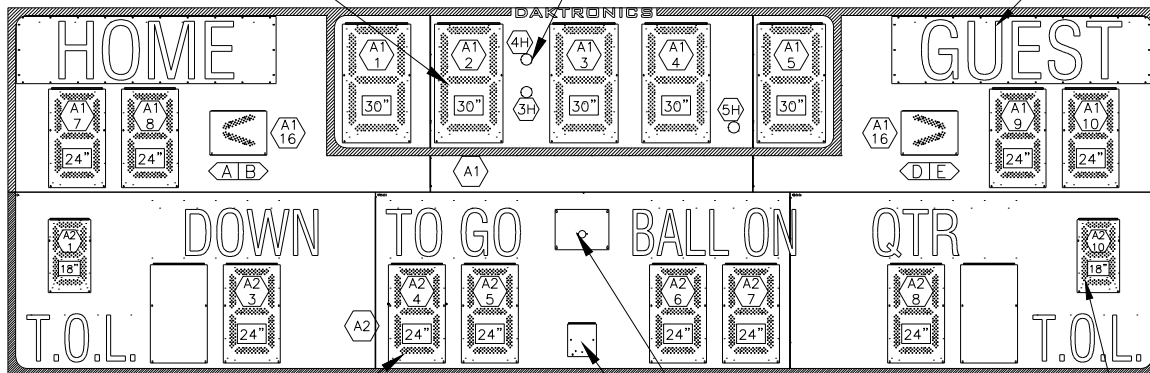

PRIMARY DRIVER (A2)
KNOCKOUTS FOR 1/2" CONDUIT
SIGNAL OPTION ON THIS DRIVER
(WIRE, FIBER, OR RADIO)


OPTIONAL HORN

OPTIONAL RADIO

OPTIONAL
TOL DIGITS

FRONT VIEW
TOP/BTM SHOWN WITH VINYL CAPTIONS

OPTIONAL BACKLIT CAPTIONS

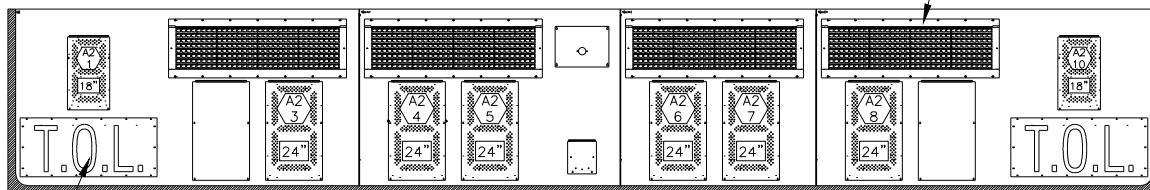

OPTIONAL
T.O.L.
BACKLIT
CAPTIONS

FRONT VIEW
BTM SHOWN WITH 8X32-34mm
ELECTRONIC CAPTIONS AND VINYL TOL

NOTES:

A1 1 = LED DRIVER NUMBER &
LED DRIVER CONNECTOR
WIRED TO THAT DIGIT.

24" = DIGIT SIZE


A1 B1 C = SEGMENT DESIGNATIONS

A1 = DRIVER NUMBER


REV 05	DATE: 06 AUG 20	PER CN-107687 REMOVED LABELS TO MOVE TO NEW STANDARD	BY: TAN
REV 04	DATE: 25 OCT 18	PER CN-66846, UPDATED LOCATION OF DAKTRONICS LOGO	BY: KDM
REV 03	DATE: 20 FEB 15	PER EC-17119, REMOVED DETAIL A AND B ADDED SIGNAL OPTION NOTE CHANGED SLAVE AND MASTER DRIVER NAME	BY: KDB
REV 02	DATE: 05 MAY 14	PER EC-14303, UPDATED LABELS	BY: KDD
REV 01	DATE: 24 APR 13	PER EC-9747, UPDAETD FB INDICATORS	BY: KDD

		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2018 DAKTRONICS, INC. (USA)			
PROJECT: OUTDOOR SCOREBOARDS					
TITLE: COMPONENT LOCATION; FB-2022-R/-A					
DATE: 13 OCT 11		DIM UNITS: INCHES [MILLIMETERS]		SHEET	
SCALE: 1/50		DO NOT SCALE DRAWING		REV 05	
DESIGN: DOPPELT		JOB NO.		1072177	
DRAWN: JVANAAR		P1647			
		FUNC - TYPE - SIZE			
		R - 08 - A			

FB-2022-W

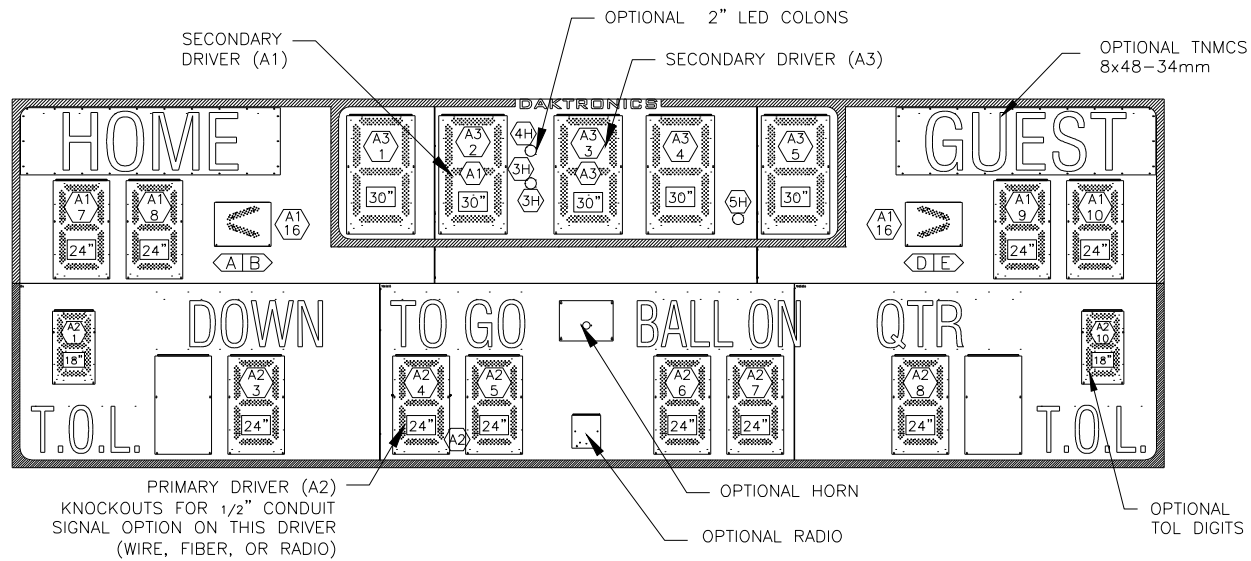

FRONT VIEW
TOP/BTM SHOWN WITH VINYL CAPTIONS

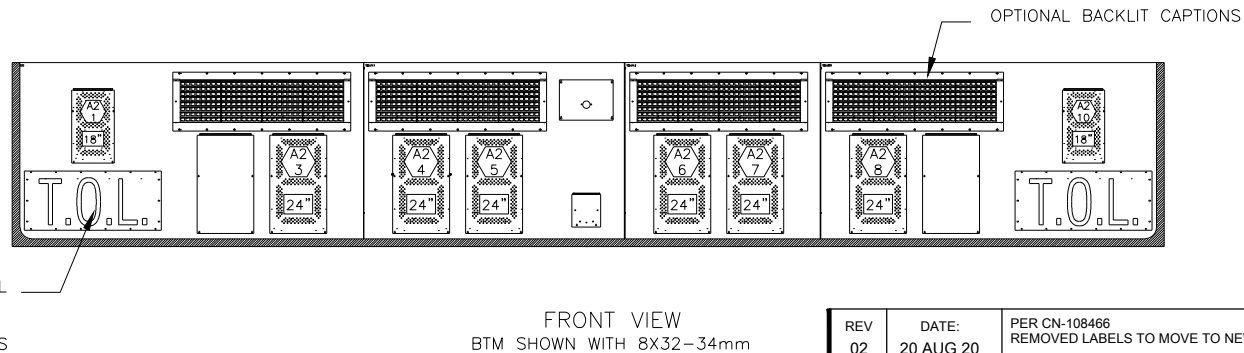

FRONT VIEW
BTM SHOWN WITH 8X32-34mm
ELECTRONIC CAPTIONS AND VINYL TOL

NOTES:

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

A|B|C = SEGMENT DESIGNATIONS

= DRIVER NUMBER

REV 02	DATE: 20 AUG 20	PER CN-108466 REMOVED LABELS TO MOVE TO NEW STANDARD	BY: TAN
REV 01	DATE: 25 OCT 18	PER CN-66846, MOVED LOCATION OF DAKTRONICS LOGO	BY: KDM
		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2017 DAKTRONICS, INC. (USA)	THIRD ANGLE PROJECTION
PROJECT: OUTDOOR SCOREBOARDS			
TITLE: COMPONENT LOCATION; FB-2022-W			
DATE: 23 MAR 15		DIM UNITS: INCHES [MILLIMETERS]	SHEET
SCALE: 1/50		DO NOT SCALE DRAWING	
DESIGN: DOPPELT	JOB NO. P1647	FUNC - TYPE - SIZE R - 08 - A	REV 02
DRAWN: ZWOODWA	3025574		