


DAKTRONICS SW-2218 PRODUCT SPECIFICATIONS

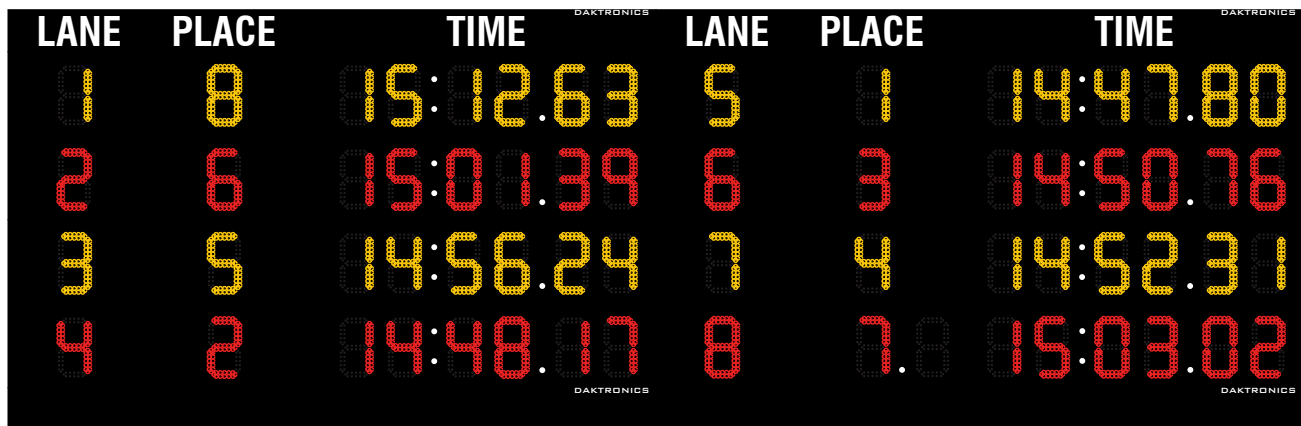

This eight-line LED aquatics scoreboard displays LANE and PLACE information along with TIME to 1/100 of a second in swimming mode. Changeable captions for diving and water polo modes are also included. Both indoor and outdoor models are available. Scoreboard shown with alternating amber and red PanaView® digits.

DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)
5'-10" H x 18'-0" W x 6" D (1.78 m, 5.49 m, 152 mm)	400 lb (181 kg)	490 Watts, 4.1 Amps

Note: Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).

DIGITS & INDICATORS

- All digits are 10" (254 mm) high.
- Select all red, all amber or alternating rows of amber and red LED digits.
- Outdoor scoreboard features robust weather-sealed digits (see [DD2495646](#)).

CAPTIONS

- All captions are 5" (127 mm) high.
- Standard captions are vinyl, applied directly to changeable panels.

DISPLAY COLOR

Choose from 150+ colors (from Martin Senour® paint book) at no additional cost.

CONSTRUCTION

Durable, lightweight aluminum cabinet for excellent corrosion resistance

PRODUCT SAFETY APPROVAL

ETL-listed and tested to CSA standards

OPERATING TEMPERATURES

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
SL04204 091819 Page 1 of 2



DAKTRONICS SW-2218 PRODUCT SPECIFICATIONS

CONTROL CONSOLES	CONTROL OPTIONS
OmniSport® 2000 (see SL-05408)	Wired (standard): One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console. Wireless (optional): 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370).

GENERAL INFORMATION

100% solid state electronics are housed in an all aluminum cabinet. Scoreboard is shipped in nine sections. Outdoor beam mounting hardware is provided; wall mounting hardware is not. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Multiple caption colors (see [DD2101644](#))
- Advertising/identification panels
- Decorative accents
- Electronic message centers and video displays in multiple sizes

ADVERTISING/IDENTIFICATION PANELS


Backlit & Non-Backlit:

1'-2" H x 9'-0" W (356 mm, 2.74 m)
 1'-9" H x 9'-0" W (533 mm, 2.74 m)
 2'-4" H x 9'-0" W (711 mm, 2.74 m)


FOR ADDITIONAL INFORMATION

- Architectural Specifications: See [SL-05251](#)
- Manual: See [DD3043167](#)

ALTERNATE SCORING MODES

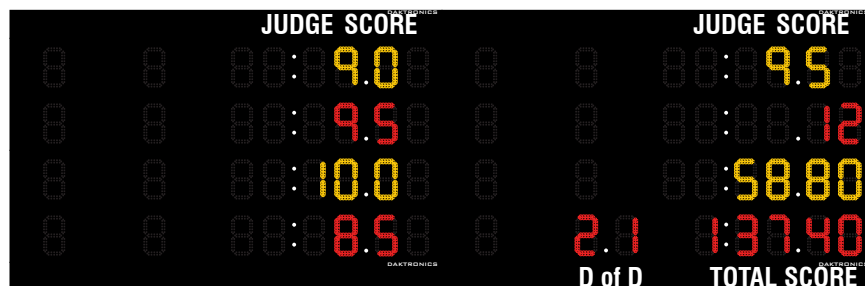

Diving Mode

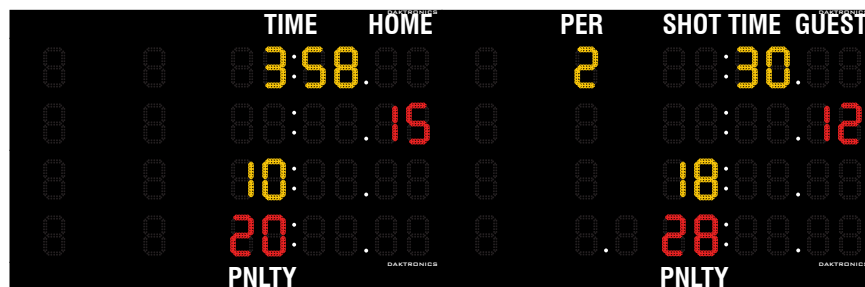

Water Polo Mode